


CONVERTX DATA SHEET



CONVERTX ULTRA SONIC FEATURES

- Three super bright genuine EPISTAR CHIP
- Two-sided VHB Tape
- High efficiency led lighting products with less consumption of energy more brightness
- Long life-span over 50,000 hours
- Reliable and qualified products meet global standards such as CE, RoHS and more

DIMENSION

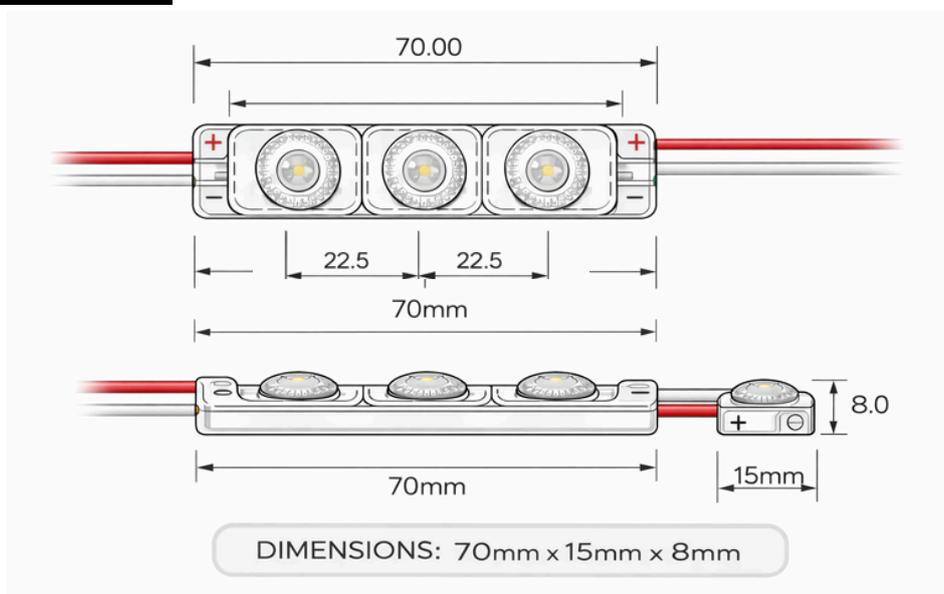

CONVERTX

DATA SHEET



NAVKAAR LIGHTING





TECHNICAL SPECIFICATION

OPERATION VOLTAGE	DC 12V
POWER CONSUMPTION	1.8W
CURRENT	150 mA
VIEWING ANGLE	175 DEGREE
COLOUR RENDERING INDEX	80
BEAM ANGLE	175 DEGREE
WEIGHT	5g
LIFESPAN	50000h
OPERATION TEMPERATURE	(-20°C - 60°C) (-4°F - 140°F)
IP RATING	IP67
COMPLIANCE WITH	RoHS / CE
WARRANTY	5 Years

CCT/LUMEN

CCT	LIGHT COLOR	LM	LM/W
3000K	WARM WHITE	160-190	95-105
4000K	NEUTRAL WHITE	180-200	100-115
6500K	PURE WHITE	180-220	100-125
10000K	WHITE	200-260	110-145





RED Led	RED	630-660nm	RED
----------------	------------	------------------	------------

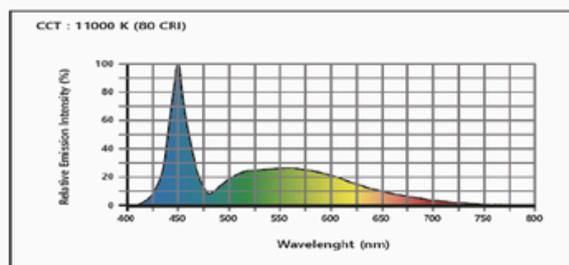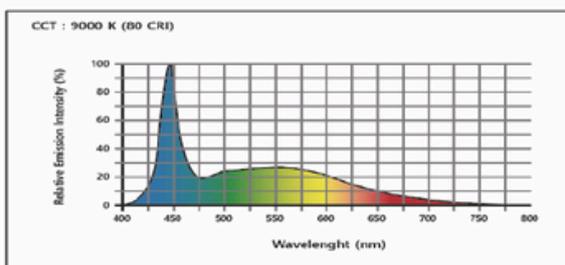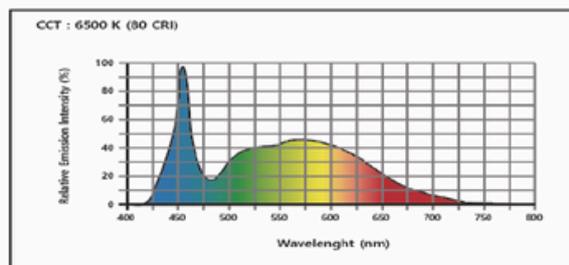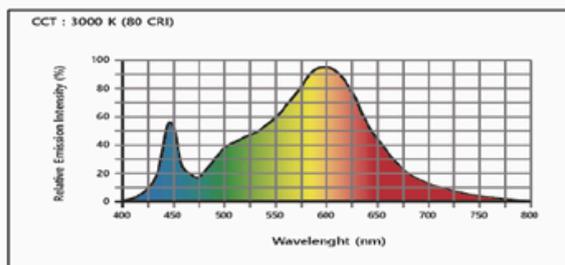

INSTALLATION GUIDE



NAVKAAR LIGHTING

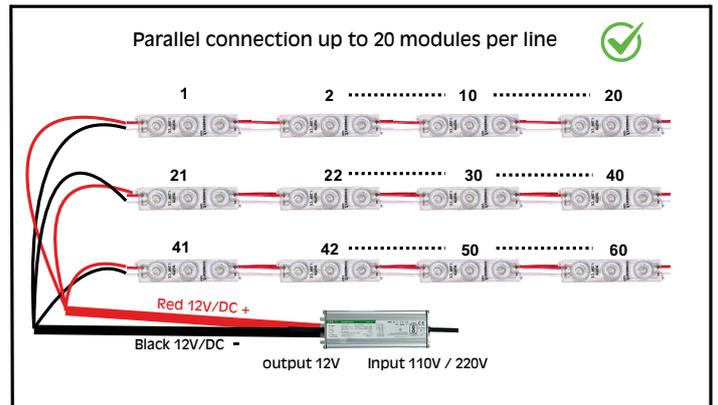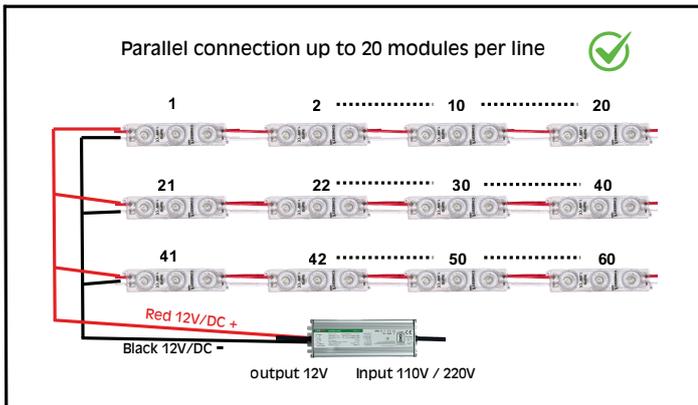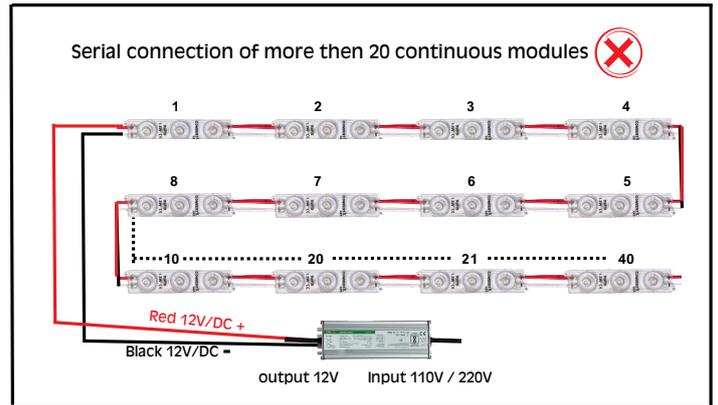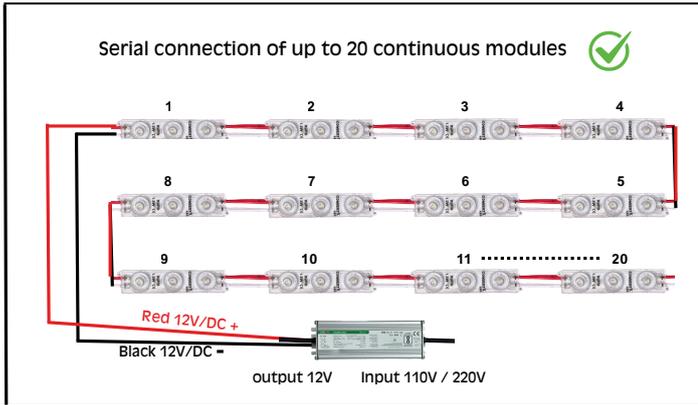

Module	Power Supply 100W	Power Supply 200W	Power Supply 300W	Power Supply 400W
1.8 W	45 Pcs	90 Pcs	135 Pcs	179 Pcs

LIGHT DISTRIBUTION GRAPH

